

SELF DRILLING FIXINGS




| Code | Screw (DxL) | Pcs X box | Boxes X carton | Cartons X Pallet |
|------|----------------|--------------|----------------|---------------------|
| FCV | * | 200 | 24 | 30 |
| FCVW | 4,5 X 40 | 150 | 24 | 30 |
| BULK | | | | |
| FCVI | * | 10.000 | * | 24 |


Benefits:

- Suitable for plasterboard walls
- Plug made of PA66 30% glass fiber
- No preliminary perforation is required
- It stays flush with the board

Applications:

- Drywall
- High resistance insulating boards
- Self-drilling screw ZB Ø 4,5x35 mm



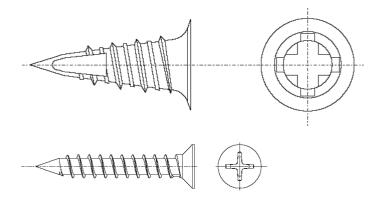





Via Del Commercio 1 60021 Camerano (AN) Italy Tel: *39 071 7819048 Email: info@bartolucci.eu

